


# Motor Starters

## Model Code Explanation

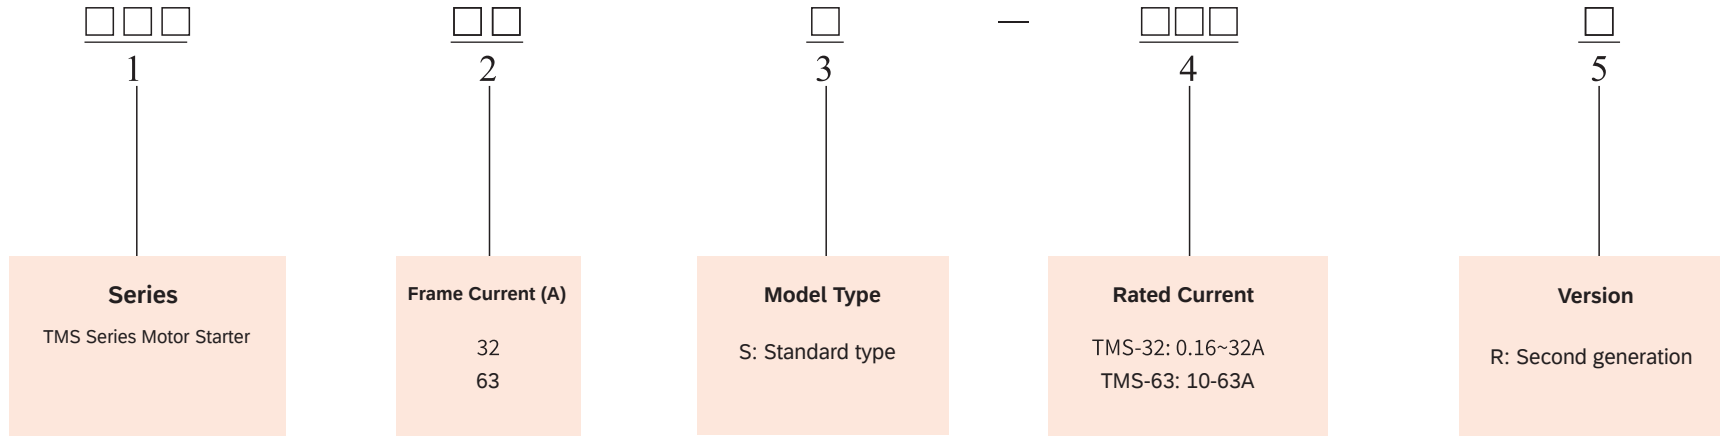


Example:  
TMS-32S-032R  
TMS-32 motor starter, standard breaking capacity, rated current 32A.


TMS Series Manual Motor Starters



Model / Cat. No.	TMS-32S	TMS-63S
Standard	IEC 60 / EN 60 947-1,947-2,947-4-1,947-5-1; UL60947; CSA C22-2n 14; 0113,0660	
Maximum Rated Current (A)	32	63
Rated Operational Voltage (Ue)	690VAC	
Trip Class	10(UL)/10A(IEC)	10
Operational Frequency (Hz)	50 / 60 Hz	
Temperature Compensation	yes	
Phase Loss Protection	yes	
Degree of Protection	IP 20	
Mechanical Durability	100,000	50,000
Electrical Durability	100,000	25,000
Storage Temperature (°C)	-25°C~+60°C	
Operating Temperature (°C)	-40°C~+80°C	
Altitude	3,000	
Rated Impulse Withstand Voltage	6kV	

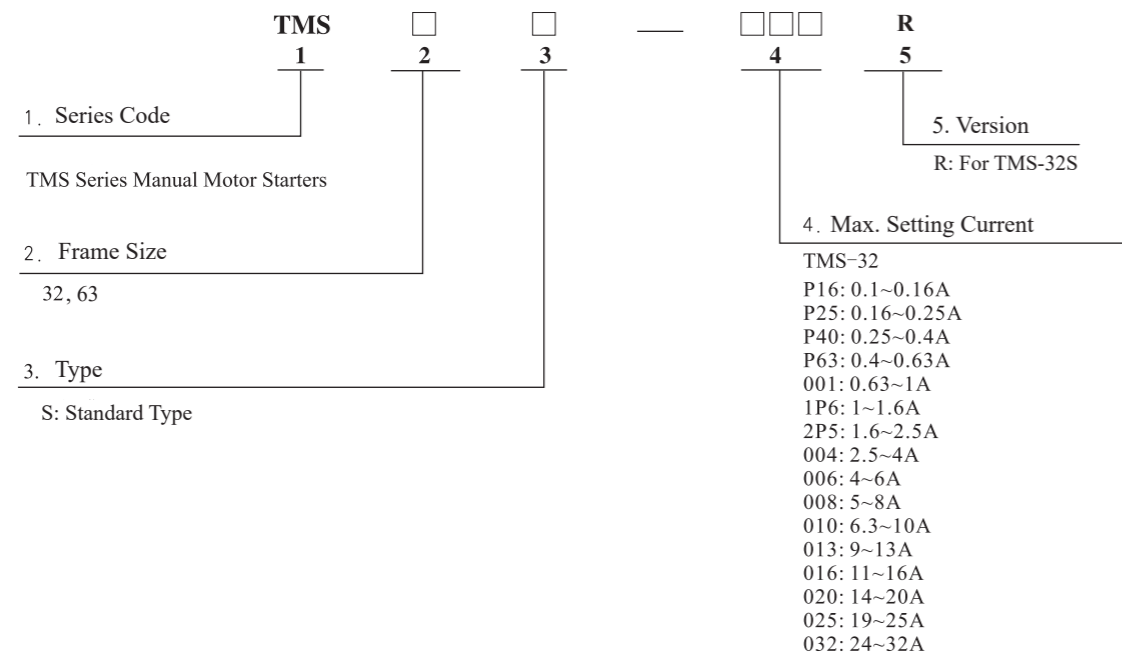


Accessories

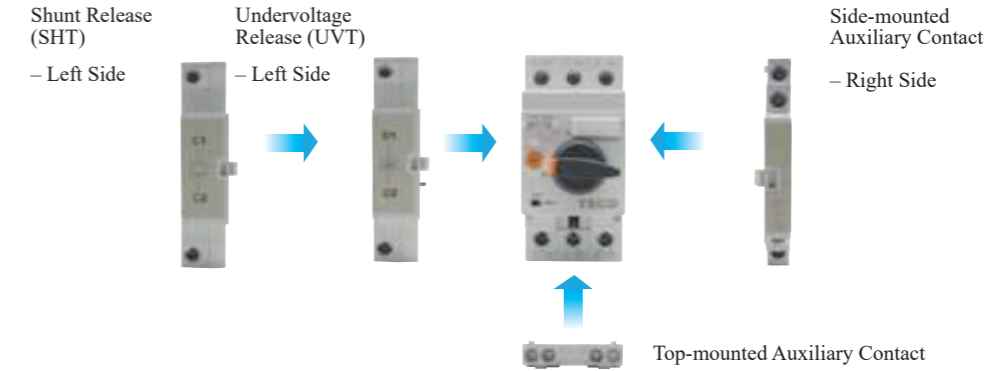


Cat. No. Explanation

● Auxiliary Switch & Alarm Switch

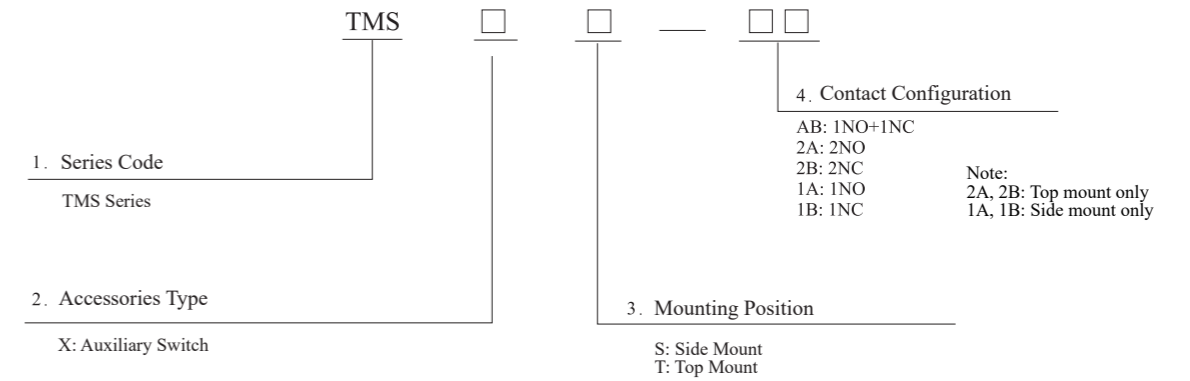

● Shunt Release & Undervoltage Release

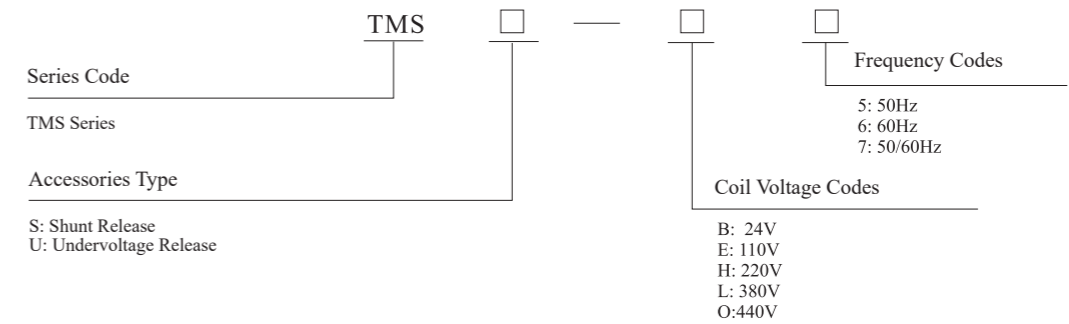

Dimensions

